




FOUR STAGE FOAM COMPATIBLE PUMP

- Compact, high efficiency and superior reliability are the hallmarks of this pump
- Four stage hydraulics and modern engineering techniques have been combined resulting in high performance
- Interchangeable with other common detachable pump end products
- Designed for easy maintenance
- Applications for this pump are in the field where high pressures are required, such as for fire fighting over long hose lays and elevation

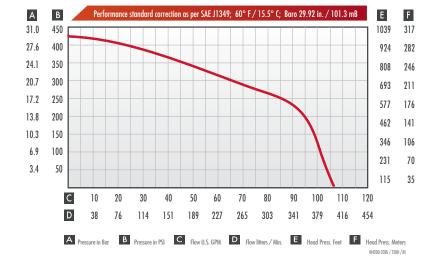

WEIGHT & DIMENSIONS

Length	11.0"	28.0 cm
Width	11.0"	28.0 cm
Height	11.0"	28.0 cm
Weight	14.7 lbs	6.7 kg
Suction	2.0" NPSH	50 mm
Discharge	1.5" NPSH	38 mm

PERFORMANCE

Performance indicated is obtained using our 23 HP Briggs & Stratton engine and a Hydro-Wick speed increaser

Note: Performance specifications can be subject to change without notice



WICK® FSP4200

BID SPECIFICATION

- The pump must be four stage with integral bearings and be able to attach to a speed increaser or engine by the use of a one-piece mounting clamp
- The pump must be cast from aluminum and be foam compatible
- The pump must be equipped with a grease nipple and be easily disassembled for maintenance
- The pump discharge must be equipped with a fitting to accommodate accessories such as a pressure gauge or primer pump
- The pump must have minimum flow and pressures as shown in the performance chart on the opposite page



WICK® FSP4200

Part#	Description
79W1216	WICK® FSP4200 4 Stage Pump End Complete



ACCESSORIES

	Part#	Description
A	79W212	Pump Mounting Clamp